




CH38

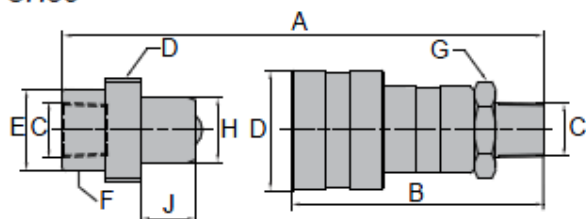


# Hydraulic Couplers


10,000 PSI Rated




CFS38

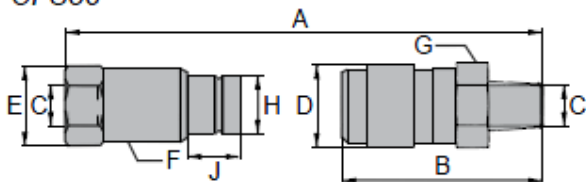


CR38

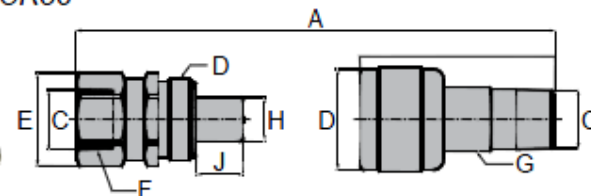

CH14

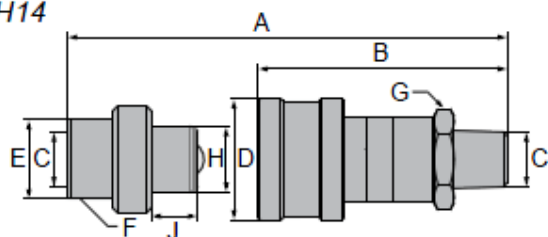

CRZ14

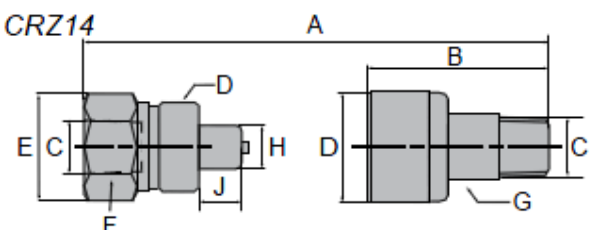

| Coupler Type         | Model Numbers |           |             | Dimensions (in) |      |             |      |      |      |      |      |      |
|----------------------|---------------|-----------|-------------|-----------------|------|-------------|------|------|------|------|------|------|
|                      | Complete Set  | Male Half | Female Half | A*              | B    | C           | D    | E    | F    | G    | H    | J    |
| High-Flow Coupler    | CH38          | CH38M     | CH38F       | 3.35            | 2.84 | 3/8"-18NPTF | 1.10 | -    | 1.00 | 0.75 | 0.63 | 0.63 |
| Flush-Face Coupler   | CFS38         | CFS38M    | CFS38F      | 4.36            | 2.85 | 3/8"-18NPTF | 1.21 | 1.06 | 1.12 | 0.79 | 0.63 | 0.63 |
| Regular-Flow Coupler | CR38          | CR38M     | CR38F       | 3.15            | 2.20 | 3/8"-18NPTF | 1.04 | -    | 0.73 | 0.50 | 0.53 | 0.53 |
| High-Flow Coupler    | CH14          | CH14M     | CH14F       | 2.83            | 2.35 | 1/4"-18NPTF | 0.87 | -    | 0.83 | 0.62 | 0.41 |      |
| Zinc Coupler         | CRZ14         | CRZ14M    | CRZ14F      | 2.42            | 1.67 | 1/4"-18NPTF | 0.95 | 0.83 | 0.58 | 0.39 | 0.35 | 0.35 |